



DESIGN <i>qp</i>	DRAWN BY <i>qp</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED <i>[Signature]</i>	APPROVED <i>[Signature]</i>	DRAWING NO. D412-664-145	REV. C SHEET 1 OF 3
DATE 07.03.29		TITLE CROSSTUBE ASS'Y (412 LOW-N FWD) NTS	
A	06.12.21	NEW ISSUE	
B	07.03.01	CHG RUBBER CUSHION	
C	07.03.29	CHG CLAMP & RUBBER CUSHION LGTH.	

RELEASED

07.04.24 *[Signature]*

PARTS LIST:





Qty	Part Number	Description
X	D412-664-145	CROSSTUBE ASSEMBLY (412 LOW-NARROW FWD)
1	D6019-128	CROSSTUBE
1	D2856-250-842	ABRASION STRIP
2	D2893-1	SUPPORT
1	D3189-3	CHAFING SHIELD
4	D3595-063-450	RUBBER CUSHION
2	MS21920-24	CLAMP
4	MS21920-25	CLAMP (OR MS21920-26)
A/R	MAGNOBOND 6398	ROCKWELL SPECIFICATION RBO-120-023 ADHESIVE (TEXTRON/BELL SPEC. 299-947-100, TYPE II, CLASS 2 ADHESIVE)

GENERAL NOTES:

- 1) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED.
- 2) MATERIAL: MANUFACTURED FROM D6019-128
FINISHED LENGTH = 124.48±0.020 (BEFORE BENDING/TRIMMING)
- 3) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME INSIDE AND OUTSIDE PER DART QSI 005 4.2
PAINT OUTSIDE PER DART 005 4.2
- 4) PART IS SYMMETRIC ABOUT CENTERLINE, EXCEPT FOR D3189-3 CHAFING SHIELD AND ASSOCIATED HARDWARE.
- 5) RUN-OFF PART. BLEND OUT EDGE LONGITUDINALLY, TRANSITION SHOULD BE SMOOTH.
- 6) BEND PROGRESSIVELY WITH A MINIMUM OF 8 PASSES. MAXIMUM TUBE FLATTENING DUE TO BENDING IS 6% BASED ON O.D.
- 7) LIQUID PENETRANT INSPECT OUTSIDE SURFACE OF CROSSTUBE PER QSI 038.
- 8) SCRIBE DART PART NUMBER AND BATCH NUMBER IN THIS AREA WITH VIBRATING STYLUS.
- 9) INSTALL D2856-XXX-YYY ABRASION STRIPS WITH A 0.13 (REF) GAP ON BOTTOM SIDE OF CROSSTUBE PER QSI 035.
- 10) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE.
- 11) APPLY A 0.03" TO 0.06" THICK LAYER OF MAGNOBOND 6398 TO THE SURFACE OF D2893-1 THAT WILL BE IN CONTACT WITH THE CROSSTUBE. LET CURE FOR 12 HOURS AFTER INSTALLATION AND PRIOR TO PACKAGING.
- 12) INSTALL MS21920-25 CLAMPS (OR -26) WITH D3595-063-450 RUBBER CUSHIONS TO SECURE D2893-1 SUPPORT ON TOP SIDE OF THE CROSSTUBE. ENSURE CLAMPS ARE OPPOSITE CROSSTUBE SUPPORT.
- 13) TORQUE CLAMPS 80 TO 100 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING.


Copyright © 2006 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.

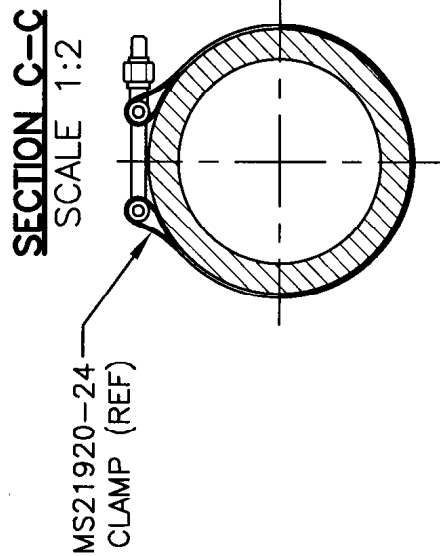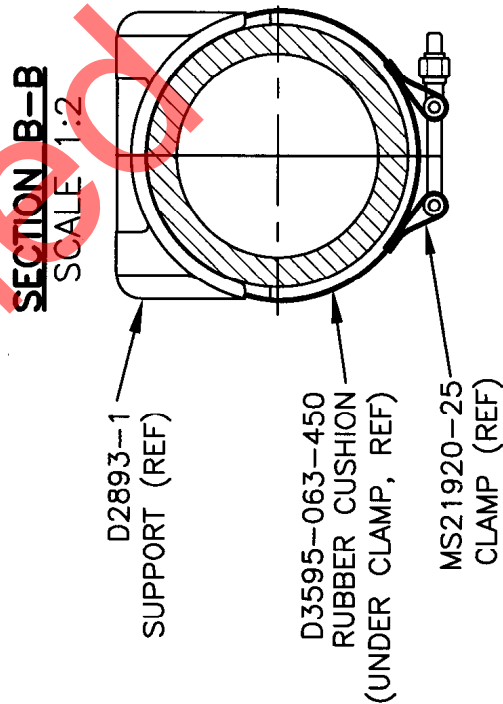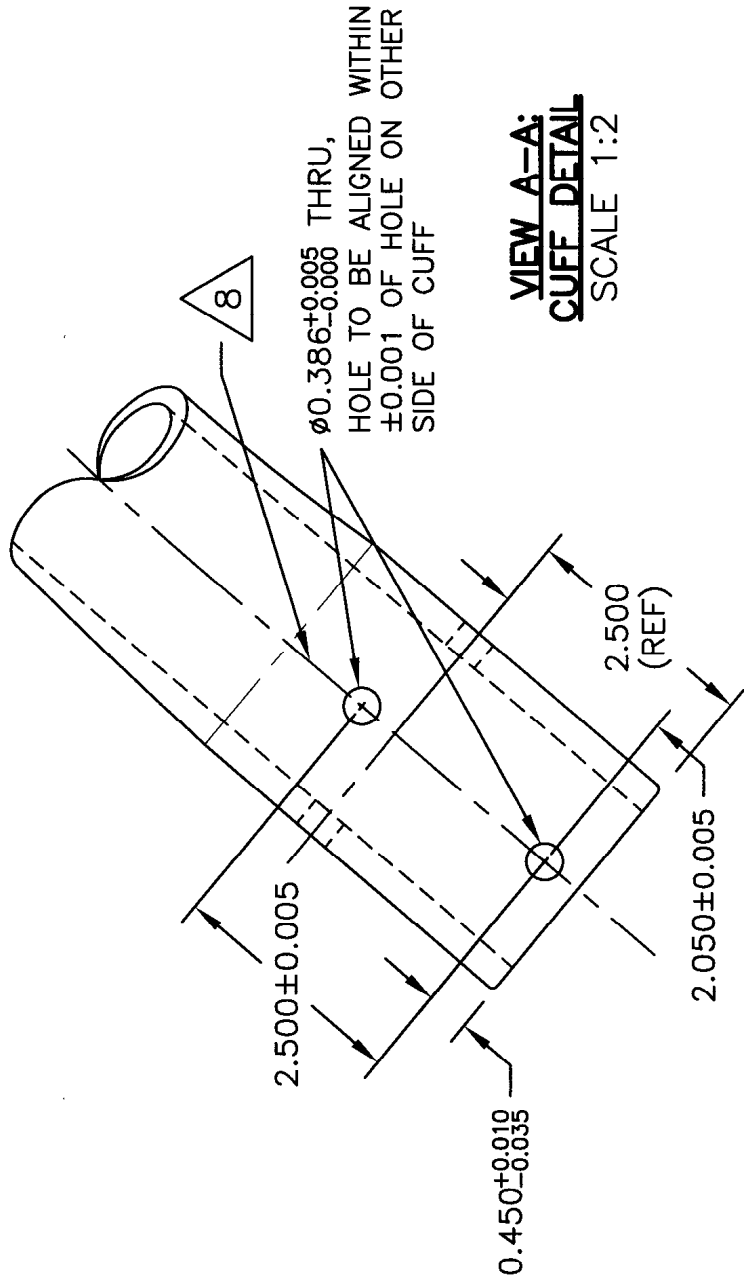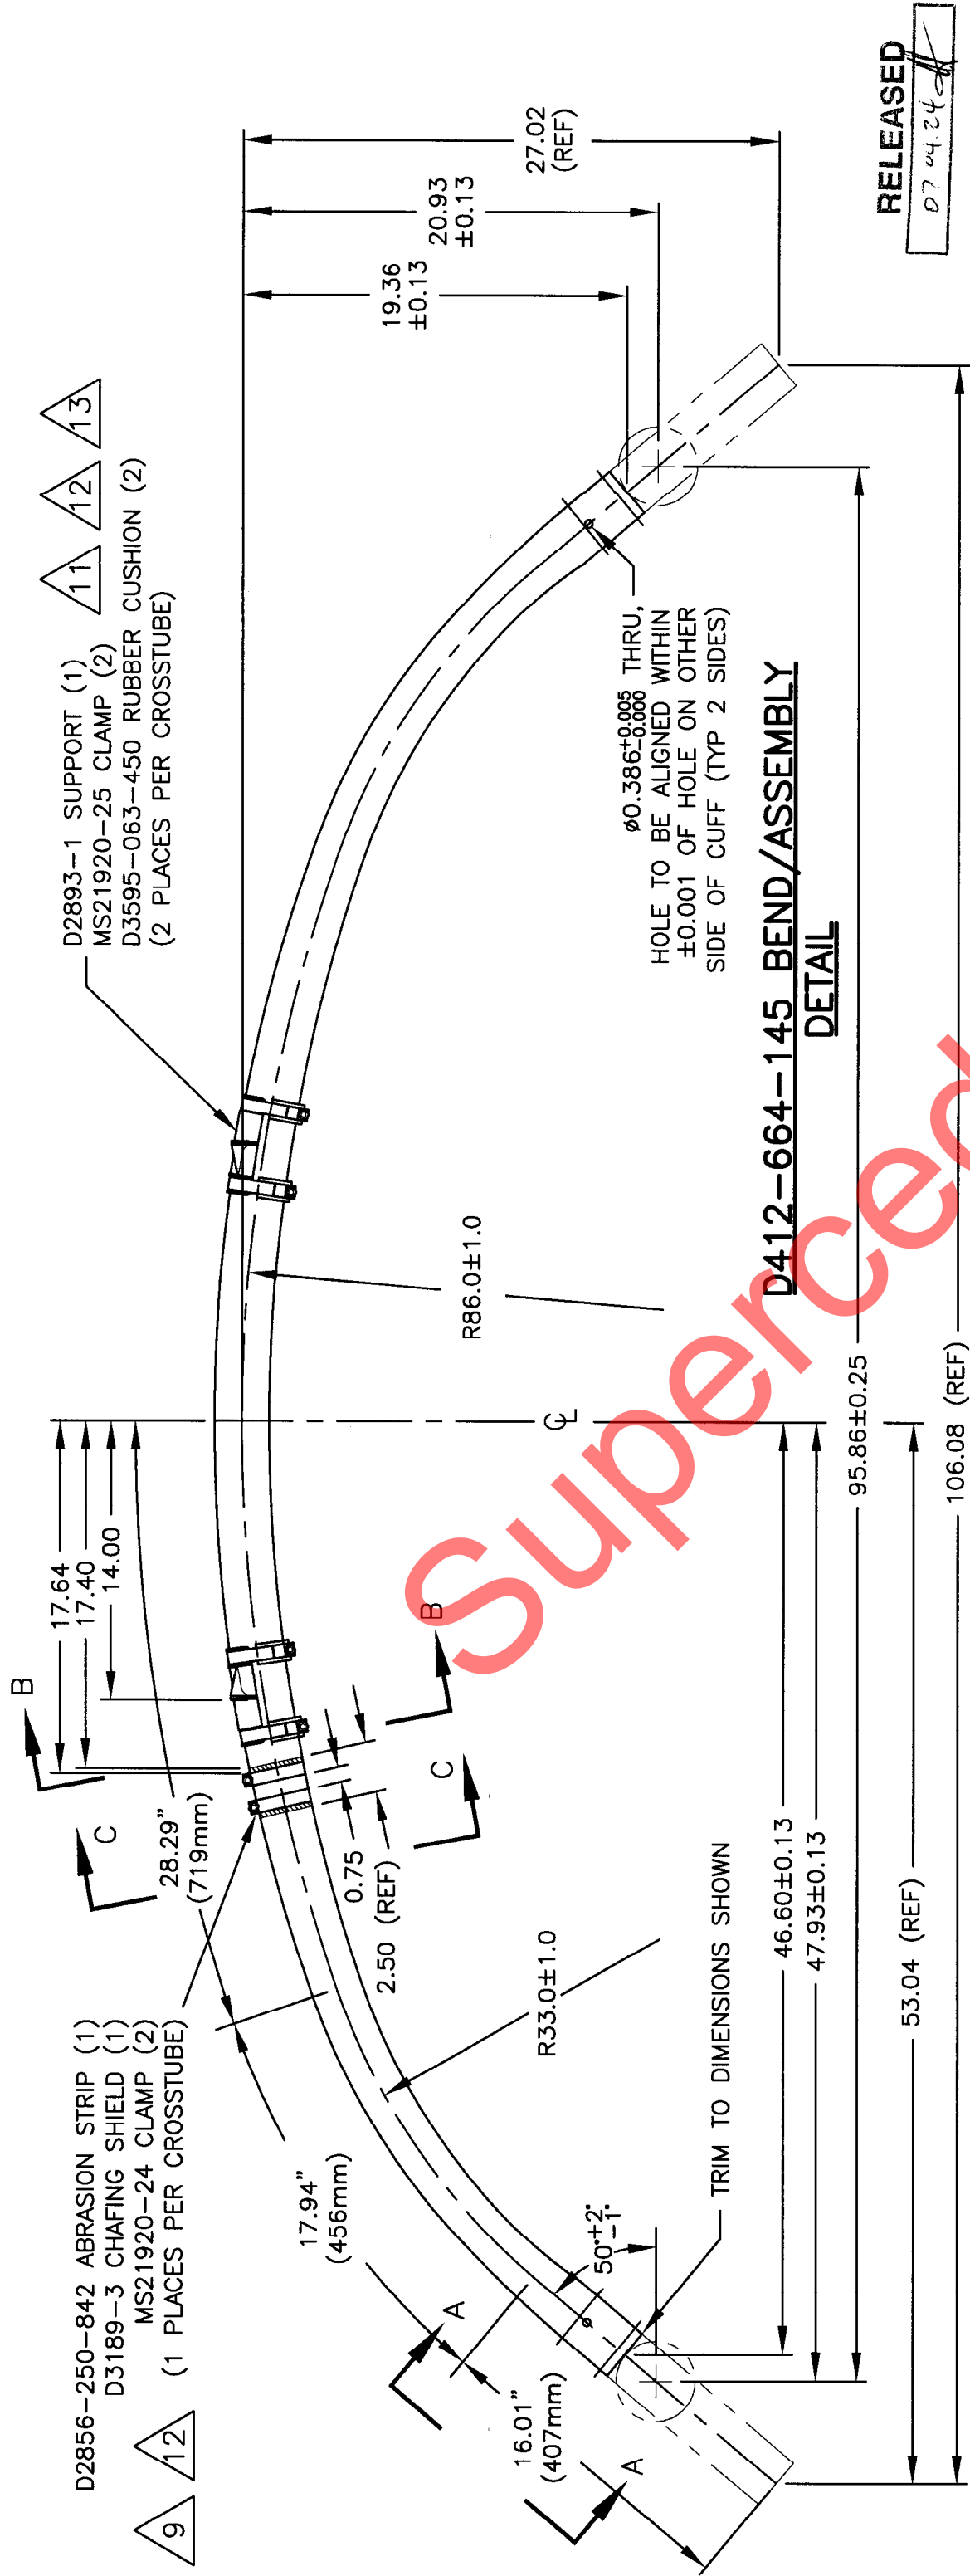

**VIEW A-A:
CUFF DETAIL**
SCALE 1:2

COPYRIGHT © 2006 BY DART AEROSPACE LTD.		DART DART AEROSPACE LTD. HAMMERSBURT, ONTARIO, CANADA		REV. C
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	DESIGN	DRAWN BY	DRAWING NO.	SHEET 2 OF 3
	CHECKED	APPROVED	D412-664-145	SCALE
	DATE		TITLE	CROSSTUBE (412 LOW-NARROW FWD) 1:8
	07.03.29			

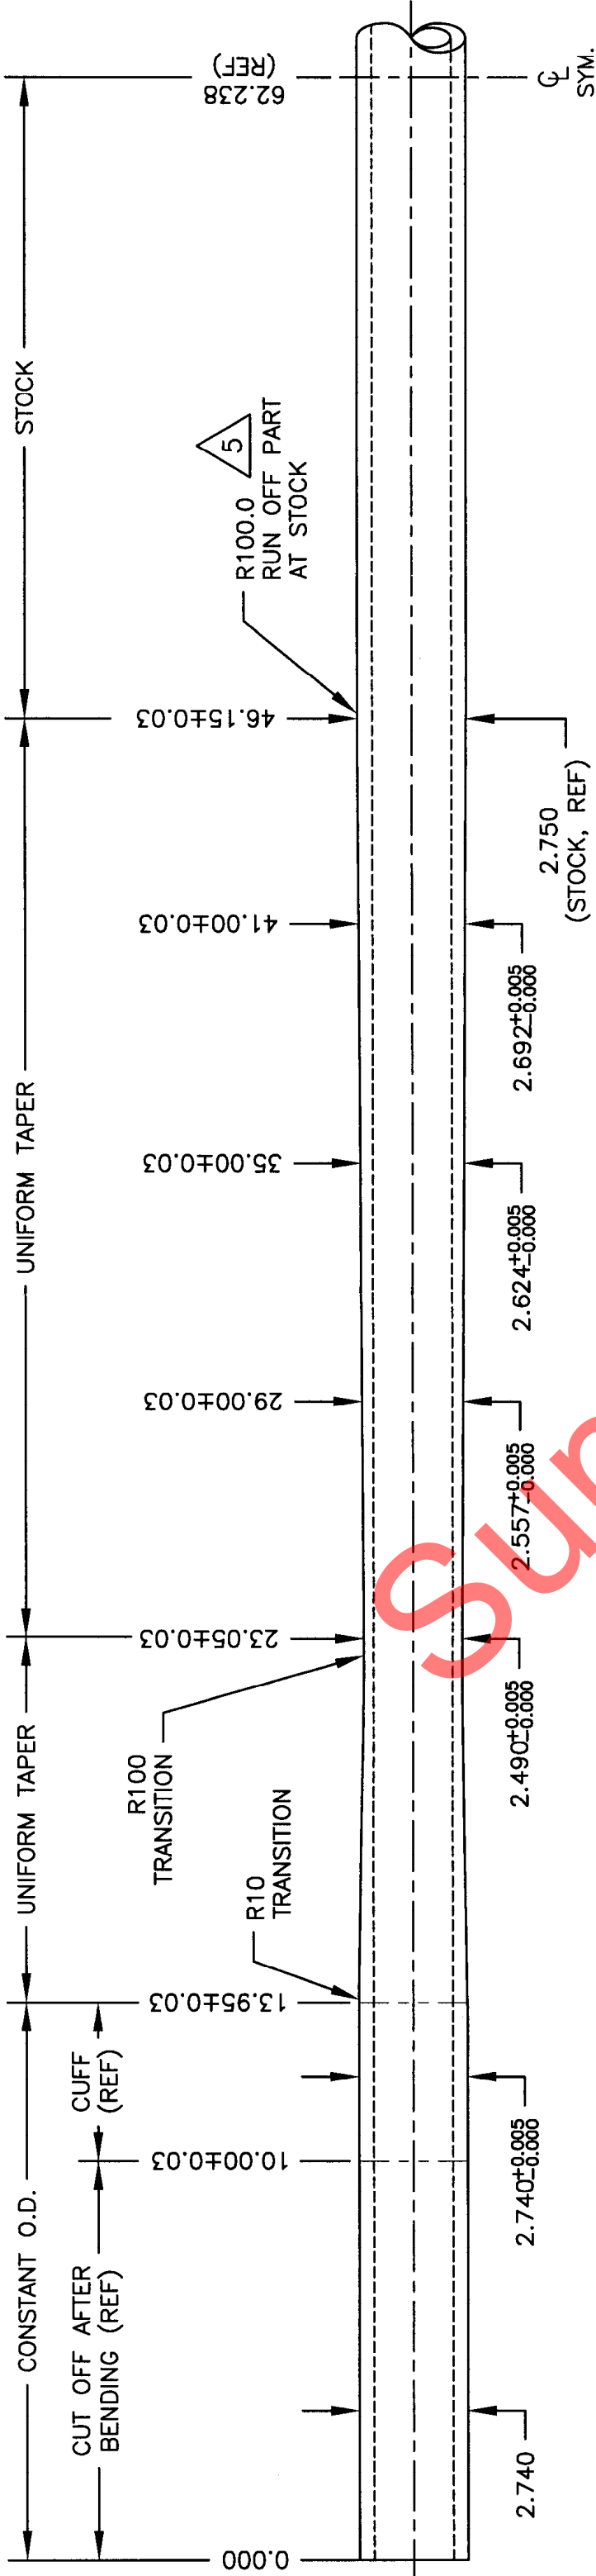

D412-664-145 MACHINING DETAIL

RELEASED
07.04.1988

COPYRIGHT © 2006 BY DART AEROSPACE LTD.		DART AEROSPACE LTD. HAMPSHIRE, ONTARIO, CANADA	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		DART	
DESIGN	DRAWN BY	DRAWING NO.	REV. C
CHECKED	APPROVED	D412-664-145	SHEET 3 OF 3
DATE	TITLE		SCALE
07.03.29	CROSSTUBE (412 LOW-NARROW FWD)		1:4